

报告编号(Report ID): MDIIGRDU16329521

锂电池 UN38.3 测试报告

Lithium Battery UN38.3 Test Report

Sample Description SafeWizard II-CashWizard II PSM-Power Supply Module
& Model 0616095

Applicant DDZ Technology Company Limited

Manufacturer EVER SPARKLE TECHNOLOGIES LTD

P O N Y 谱 尼 测 试
Pony Testing International Group
www.ponytest.com

No.: MDIIGRDU16329521
Code: guodzr1

注: 本电子版用于客户校对确认。最终内容请以正式报告为准。

Report in electronic version is only for client's preview and reference. For confirmative content, formal test report shall prevail.

I、 SAMPLE DESCRIPTION

Sample Description	SafeWizard II -CashWizard II PSM-Power Supply Module		Sample Model	0616095	
Applicant	DDZ Technology Company Limited				
Manufacturer	EVER SPARKLE TECHNOLOGIES LTD				
Nominal Voltage	12V	Rated Capacity	3000mAh	Limited Charge Voltage	12.6V
Charge Current	1500mA	Maximum Continuous Charge Current	3000mA	End Charge Current	60mA
Cut-off Voltage	9.0V	Maximum Discharge Current	3000mA	Use	---
Cell Number In Each Battery	3PCS	Cell Model	18650-3000mAh	Cell Capacity	3000mAh
Manufacturer of cell	SAMSUNG SDI				
Entrust date	2016-08-11		Finished date	2016-10-21	

II、 TEST METHOD

《United Nations Recommendations On The Transport Of Dangerous Goods, Manual Of Tests And Criteria》
(ST/SG/AC.10/11/Rev.6, 38.3).

III、 TEST ITEM

- | | |
|------------------------|---------------------------|
| 1. Altitude simulation | 5. External short circuit |
| 2. Thermal test | 6. Impact |
| 3. Vibration | 7. Overcharge |
| 4. Shock | 8. Forced discharge |

IV、 CONCLUSION

ITEM	SAMPLE NUMBER	STANDARD	CONCLUSION	
Altitude simulation	N1~N4 C1~C4	UN38.3 ST/SG/AC.10/11/Rev.6	PASS	
Thermal test			PASS	
Vibration			PASS	
Shock			PASS	
External short circuit			PASS	
Impact			N9~N13	PASS
Overcharge			N5~N8 C5~C8	PASS
Forced discharge			N14~N23 C9~C18	PASS

The Samples has passed the test items of UNITED NATIONS “Recommendations on the TRANSPORT OF DANGEROUS GOODS” Manual of Tests and Criteria, ST/SG/AC.10/11/Rev.6.

Prepared by:

Checked by:

Approved by:

Issue Date: October 21, 2016

注：本电子版用于客户校对确认。最终内容请以正式报告为准。

Report in electronic version is only for client's preview and reference. For confirmative content, formal test report shall prevail.

Notes:

N1~N8: Batteries at first cycle in fully charged states;

N9~N13: Cells at first cycle at 50% of the design rated capacity;

N14~N23: Cells at first cycle in fully discharged states;

C1~C8: Batteries after 50 cycles ending in fully charged states;

C9~C18: Cells after 50 cycles ending in fully discharged states.

V、 PHOTO OF THE SAMPLE



Authenticate the photo on original report only

注：本电子版用于客户校对确认。最终内容请以正式报告为准。

Report in electronic version is only for client's preview and reference. For confirmative content, formal test report shall prevail.

深圳市南山区创业路中兴工业城六栋一层

VI、 TEST METHOD

Tests T.1 to T.5 shall be conducted in sequence on the same cell or battery. Tests T.6 and T.8 shall be conducted using not otherwise tested cells or batteries. Test T.7 may be conducted using undamaged batteries previously used in tests T.1 to T.5 for purposes of testing on cycled batteries.

In order to quantify the mass loss, the following procedure is provided:

$$\text{Mass loss(\%)} = (M_1 - M_2) / M_1 \times 100$$

Where M_1 is the mass before the test and M_2 is the mass after the test. When mass loss does not exceed the values in Table blow, it shall be considered as “no mass loss”.

Mass M of cell or battery	Mass loss limit
$M < 1\text{g}$	0.5%
$1\text{g} \leq M \leq 75\text{g}$	0.2%
$M > 75\text{g}$	0.1%

T.1 Altitude simulation

Test cells and batteries shall be stored at a pressure of 11.6 kPa or less for at least six hours at ambient temperature ($20 \pm 5 \text{ }^\circ\text{C}$).

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.2 Thermal test

Test cells and batteries are to be stored for at least six hours at a test temperature equal to $72 \pm 2 \text{ }^\circ\text{C}$, followed by storage for at least six hours at a test temperature equal to $-40 \pm 2 \text{ }^\circ\text{C}$. The maximum time interval between test temperature extremes is 30 minutes. This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambient temperature ($20 \pm 5 \text{ }^\circ\text{C}$). For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12 hours.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

注：本电子版用于客户校对确认。最终内容请以正式报告为准。

Report in electronic version is only for client's preview and reference. For confirmative content, formal test report shall prevail.

T.3 Vibration

Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration. The vibration shall be a sinusoidal waveform with a logarithmic sweep between 7 Hz and 200 Hz and back to 7 Hz traversed in 15 minutes. This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting positions of the cell. One of the directions of vibration must be perpendicular to the terminal face.

The logarithmic frequency sweep shall differ for cells and batteries with a gross mass of not more than 12 kg (cells and small batteries), and for batteries with a gross mass of more than 12 kg (large batteries).

For cells and small batteries: from 7 Hz a peak acceleration of 1 g_n is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 8 g_n occurs (approximately 50 Hz).

A peak acceleration of 8 g_n is then maintained until the frequency is increased to 200 Hz.

For large batteries: from 7 Hz to a peak acceleration of 1 g_n is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 2 g_n occurs (approximately 25 Hz). A peak acceleration of 2 g_n is then maintained until the frequency is increased to 200 Hz.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire during the test and after the test and if the open circuit voltage of each test cell or battery after testing in its perpendicular mounting position is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.4 Shock

Test cells and batteries shall be secured to the testing machine by means of a rigid mount which will support all mounting surfaces of each test battery.

Each cell shall be subjected to a half-sine shock of peak acceleration of 150 g_n and pulse duration of 6 milliseconds. Alternatively, large cells may be subjected to a half-sine shock of peak acceleration of 50 g_n and pulse duration of 11 milliseconds.

Each battery shall be subjected to a half-sine shock of peak acceleration depending on the mass of the battery. The pulse duration shall be 6 milliseconds for small batteries and 11 milliseconds for large batteries. The formulas below are provided to calculate the appropriate minimum peak accelerations.

注：本电子版用于客户校对确认。最终内容请以正式报告为准。

Report in electronic version is only for client's preview and reference. For confirmative content, formal test report shall prevail.

Battery	Minimum peak acceleration	Pulse duration
Small batteries	<p>150 g_n or result of formula</p> $\text{Acceleration}(g_n) = \sqrt{\left(\frac{100850}{\text{mass}^*}\right)}$ <p>Whichever is smaller</p>	6 ms
Large batteries	<p>50 g_n or result of formula</p> $\text{Acceleration}(g_n) = \sqrt{\left(\frac{30000}{\text{mass}^*}\right)}$ <p>Whichever is smaller</p>	11 ms

* Mass is expressed in kilograms.

Each cell or battery shall be subjected to three shocks in the positive direction and to three shocks in the negative direction in each of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.5 External short circuit

The cell or battery to be tested shall be heated for a period of time necessary to reach a homogeneous stabilized temperature of $57 \pm 4^\circ\text{C}$, measured on the external case. This period of time depends on the size and design of the cell or battery and should be assessed and documented. If this assessment is not feasible, the exposure time shall be at least 6 hours for small cells and small batteries, and 12 hours for large cells and large batteries. Then the cell or battery at $57 \pm 4^\circ\text{C}$ shall be subjected to one short circuit condition with a total external resistance of less than 0.1 ohm. This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to $57 \pm 4^\circ\text{C}$, or in the case of the large batteries, has decreased by half of the maximum temperature increase observed during the test and remains below that value. The short circuit and cooling down phases shall be conducted at least at ambient temperature.

Cells and batteries meet this requirement if their external temperature does not exceed 170°C and there is no disassembly, no rupture and no fire during the test and within six hours after the test.

注：本电子版用于客户校对确认。最终内容请以正式报告为准。

Report in electronic version is only for client's preview and reference. For confirmative content, formal test report shall prevail.

T.6 Impact / Crush

Impact (applicable to cylindrical cells not less than 18 mm in diameter)

The test sample cell or component cell is to be placed on a flat smooth surface. A 15.8 mm \pm 0.1mm diameter, at least 6 cm long, or the longest dimension of the cell, whichever is greater, Type 316 stainless steel bar is to be placed across the centre of the sample. A 9.1 kg \pm 0.1 kg mass is to be dropped from a height of 61 \pm 2.5 cm at the intersection of the bar and sample in a controlled manner using a near frictionless, vertical sliding track or channel with minimal drag on the falling mass. The vertical track or channel used to guide the falling mass shall be oriented 90 degrees from the horizontal supporting surface.

The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the 15.8 mm \pm 0.1mm diameter curved surface lying across the centre of the test sample. Each sample is to be subjected to only a single impact.

Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells less than 18 mm in diameter)

A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5 cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached.

- (a) The applied force reaches 13 kN \pm 0.78 kN;
- (b) The voltage of the cell drops by at least 100 mV; or
- (c) The cell is deformed by 50% or more of its original thickness.

Once the maximum pressure has been obtained, the voltage drops by 100 mV or more, or the cell is deformed by at least 50% of its original thickness, the pressure shall be released.

A prismatic or pouch cell shall be crushed by applying the force to the widest side. A button/coin cell shall be crushed by applying the force on its flat surfaces. For cylindrical cells, the crush force shall be applied perpendicular to the longitudinal axis.

Each test cell or component cell is to be subjected to one crush only. The test sample shall be observed for a further 6 h. The test shall be conducted using test cells or component cells that have not previously been subjected to other tests.

Cells and component cells meet this requirement if their external temperature does not exceed 170 °C and there is no disassembly and no fire during the test and within six hours after this test.

T.7 Overcharge

The charge current shall be twice the manufacturer's recommended maximum continuous charge current. The minimum voltage of the test shall be as follows:

注：本电子版用于客户校对确认。最终内容请以正式报告为准。

Report in electronic version is only for client's preview and reference. For confirmative content, formal test report shall prevail.

- (a) When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V.
- (b) When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage.

Tests are to be conducted at ambient temperature; the duration of the test shall be 24 hours.

Rechargeable batteries meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

T.8 Forced discharge

Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer.


The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in ampere).

Primary or rechargeable cells meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

注：本电子版用于客户校对确认。最终内容请以正式报告为准。

Report in electronic version is only for client's preview and reference. For confirmative content, formal test report shall prevail.

VII、 TEST PROCEDURE

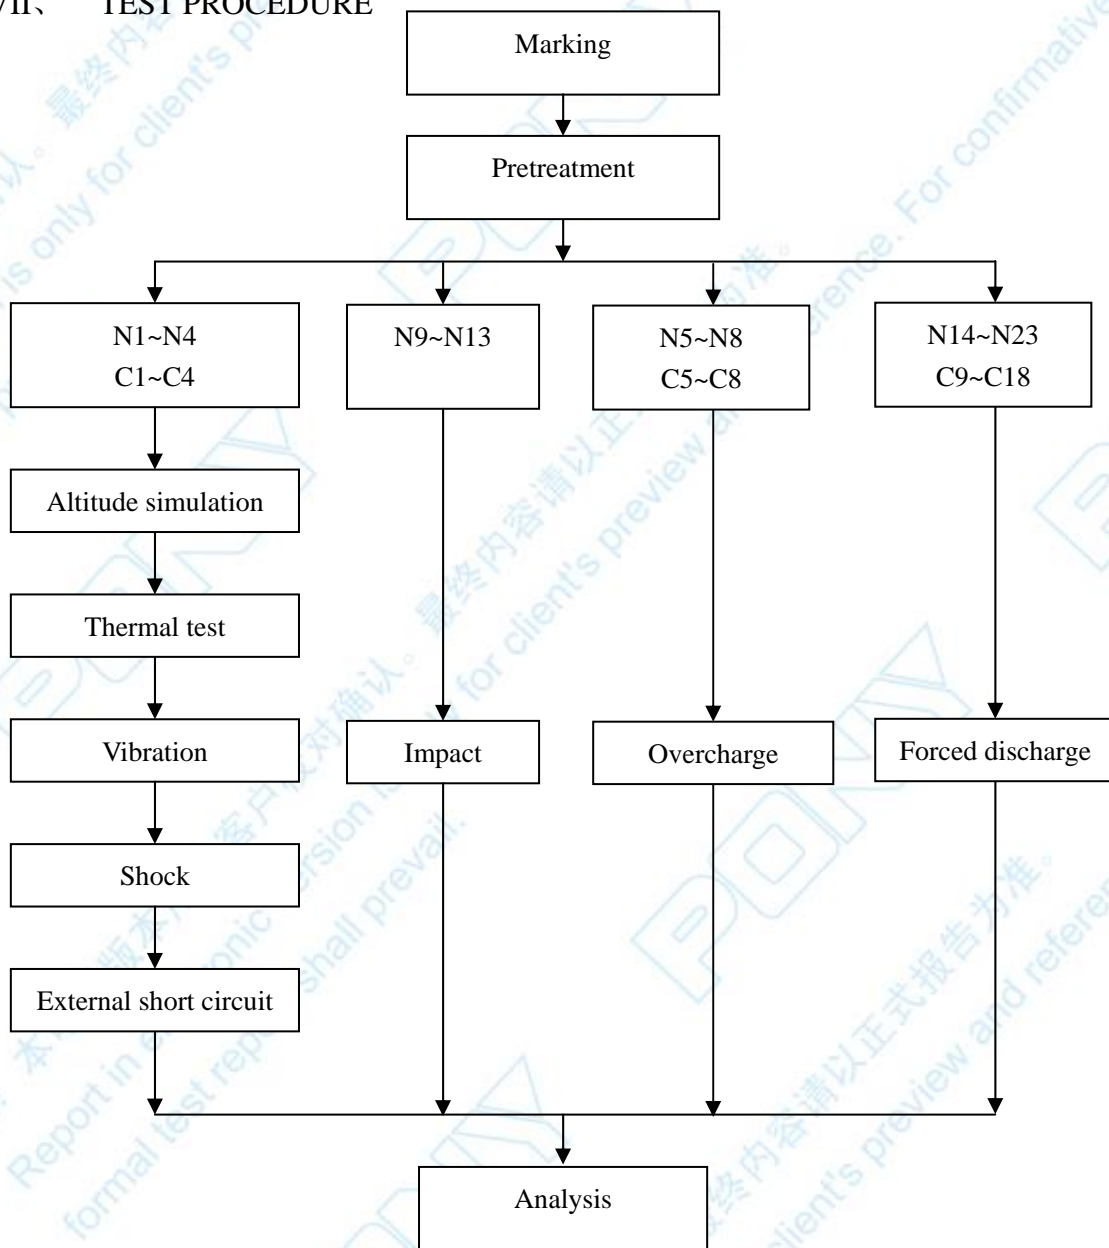

VIII、 TEST APPARATUS

- | | |
|---|--|
| IE-0121 Rechargeable battery test system | IE-0287 Shock test instrument |
| IE-0434 Vacuum chamber | IE-0281 Temperature control circuit tester |
| IE-0090 Digital multimeter | IE-0185 Thermoelectric pair |
| IE-0259 Electronic balance | IE-0506 Battery impact test instrument |
| IE-0219 Temperature change chamber | IE-0511 DC regulated power supply |
| IE-0503 Electrodynamic type vibration test instrument | |
| IE-0077 TPR series high precision DC regulated power supply | |
| IE-0513 High precision battery test instrument | |

注：本电子版用于客户校对确认。最终内容请以正式报告为准。

Report in electronic version is only for client's preview and reference. For confirmative content, formal test report shall prevail.

IX、 DATA

1. Altitude simulation

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
N1	332.992	12.39	332.915	12.34	0.023	0.404	N
N2	331.124	12.39	331.056	12.35	0.021	0.323	N
N3	332.829	12.40	332.520	12.35	0.093	0.403	N
N4	332.392	12.39	332.344	12.35	0.014	0.323	N
C1	333.585	12.34	333.516	12.31	0.021	0.243	N
C2	332.236	12.34	332.154	12.31	0.025	0.243	N
C3	334.297	12.33	334.215	12.31	0.025	0.162	N
C4	332.375	12.34	332.297	12.32	0.023	0.162	N

2. Thermal test

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
N1	332.915	12.34	332.728	12.33	0.056	0.081	N
N2	331.056	12.35	330.866	12.32	0.057	0.243	N
N3	332.520	12.35	332.326	12.32	0.058	0.243	N
N4	332.344	12.35	332.130	12.32	0.064	0.243	N
C1	333.516	12.31	333.298	12.30	0.065	0.081	N
C2	332.154	12.31	331.951	12.30	0.061	0.081	N
C3	334.215	12.31	334.000	12.30	0.064	0.081	N
C4	332.297	12.32	332.099	12.30	0.060	0.162	N

注：本电子版用于客户校对确认。最终内容请以正式报告为准。

Report in electronic version is only for client's preview and reference. For confirmative content, formal test report shall prevail.

3. Vibration

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
N1	332.728	12.33	332.725	12.31	0.001	0.162	N
N2	330.866	12.32	330.865	12.31	0.000	0.081	N
N3	332.326	12.32	332.324	12.30	0.001	0.162	N
N4	332.130	12.32	332.128	12.27	0.001	0.406	N
C1	333.298	12.30	333.294	12.26	0.001	0.325	N
C2	331.951	12.30	331.949	12.27	0.001	0.244	N
C3	334.000	12.30	333.997	12.27	0.001	0.244	N
C4	332.099	12.30	332.097	12.30	0.001	0.000	N

4. Shock

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
N1	332.725	12.31	332.723	12.31	0.001	0.000	N
N2	330.865	12.31	330.865	12.31	0.000	0.000	N
N3	332.324	12.30	332.324	12.30	0.000	0.000	N
N4	332.128	12.27	332.128	12.26	0.000	0.081	N
C1	333.294	12.26	333.294	12.26	0.000	0.000	N
C2	331.949	12.27	331.946	12.27	0.001	0.000	N
C3	333.997	12.27	333.997	12.27	0.000	0.000	N
C4	332.097	12.30	332.097	12.30	0.000	0.000	N

注：本电子版用于客户校对确认。最终内容请以正式报告为准。

Report in electronic version is only for client's preview and reference. For confirmative content, formal test report shall prevail.

5. External short circuit

No.	Peak temperature (°C)	Whether disassembly, rupture, fire (Y/N)
N1	57.3	N
N2	57.5	N
N3	57.2	N
N4	57.4	N
C1	57.3	N
C2	57.5	N
C3	57.4	N
C4	57.2	N

6. Impact

No.	Peak temperature (°C)	Whether disassembly, fire (Y/N)
N9	107.7	N
N10	81.7	N
N11	104.5	N
N12	47.6	N
N13	116.7	N

7. Overcharge

No.	Whether disassembly, fire (Y/N)
N5	N
N6	N
N7	N
N8	N
C5	N
C6	N
C7	N
C8	N

注：本电子版用于客户校对确认。最终内容请以正式报告为准。

Report in electronic version is only for client's preview and reference. For confirmative content, formal test report shall prevail.

8. Forced discharge

No.	Whether disassembly, fire (Y/N)
N14	N
N15	N
N16	N
N17	N
N18	N
N19	N
N20	N
N21	N
N22	N
N23	N
C9	N
C10	N
C11	N
C12	N
C13	N
C14	N
C15	N
C16	N
C17	N
C18	N

*** End of report ***

注：本电子版用于客户校对确认。最终内容请以正式报告为准。

Report in electronic version is only for client's preview and reference. For confirmative content, formal test report shall prevail.

深圳市南山区创业路中兴工业城六栋一层